


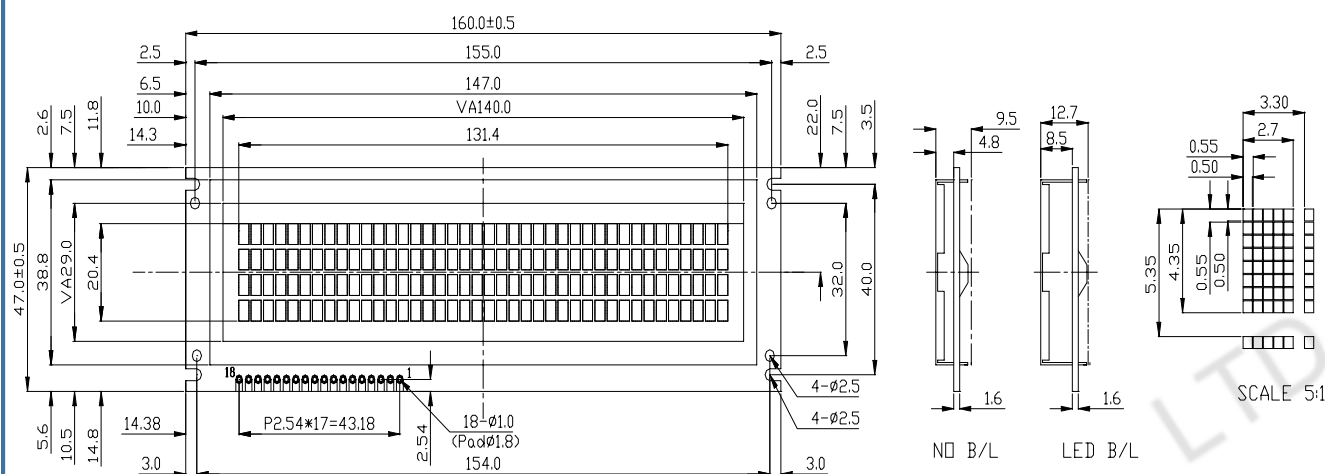

■ FEATURES

- ◆ 5 x 7 DOTS WITH CURSOR
- ◆ BUILT-IN CONTROLLER (KS0066 OR EQUIVALENT)
- ◆ 2.7~5.5 V POWER SUPPLY
- ◆ 1/16 DUTY CYCLE
- ◆ 8-BIT PARALLEL INTERFACE

MECHANICAL DATA

ITEM	DIMENSIONS	UNIT
Module Size (W x H x T)	160.0 x 47.0 x 9.5(12.7)	mm
Viewing Area (W x H)	140.0 x 29.0	mm
Character Size (W x H)	2.70 x 4.35	mm
Character Pitch (W x H)	3.30 x 5.35	mm
Dot Size (W x H)	0.50 x 0.50	mm
Dot Pitch (W x H)	0.55 x 0.55	mm

■ INTERFACE PIN CONNECTIONS

NO.	SYMBOL	FUNCTION	NO.	SYMBOL	FUNCTION
1	V _{SS}	Supply Ground	10	DB2	Data Bit 2
2	V _{DD}	Supply Voltage	11	DB3	Data Bit 3
3	V _O	Contrast Adj.	12	DB4	Data Bit 4
4	RS	Register Select	13	DB5	Data Bit 5
5	R/W	Read/Write	14	DB6	Data Bit 6
6	E1	Enable IC1	15	DB7	Data Bit 7
7	E2	Enable IC2	16	A	LED Power
8	DB0	Data Bit 0	17	K	LED Power
9	DB1	Data Bit 1	18	NC	No Control

ELECTRICAL CHARACTERISTICS

ITEM		SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
LCD Operating Voltage		V _{DD-V0}	T=0°C	-	4.8	-	V
			T=25°C	-	4.5	-	V
			T=50°C	-	4.2	-	V
Supply Voltage		V _{DD-VSS}	-	2.7	5	5.5	V
Supply Current		I _{DD}	-	-	3.2	6	mA
Input Voltage	"HIGH" Level	V _{IH}	-	2.2	-	V _{DD}	V
	"LOW" Level	V _{IL}	-	0	-	0.6	V
Output Voltage	"HIGH" Level	V _{OH}	-	2.4	-	-	V
	"LOW" Level	V _{OL}	-	-	-	0.4	V

■ BLOCK DIAGRAM

