





Pin No.	Symbol	Pin No.	Symbol
31	D15	1	LED_K
32	D16	2	LED_K
33	D17	3	LED_A
34	D00	4	LED_A
35	D01	5	GND
36	D02	6	NC
37	D03	7	NC
38	D04	8	NC
39	D05	9	NC
40	D06	10	GND
41	D07	11	NC
42	HSYNC	12	NC
43	VSYNC	13	NC
44	DOTCLK	14	RESET
45	NC	15	CSB
46	NC	16	SCL
47	VCC	17	SDA
48	VCC	18	D20
		19	D21
		20	D22
		21	D23
		22	D24
		23	D25
		24	D26
		25	D27
		26	D10
		27	D11
		28	D12
		29	D13
		30	D14

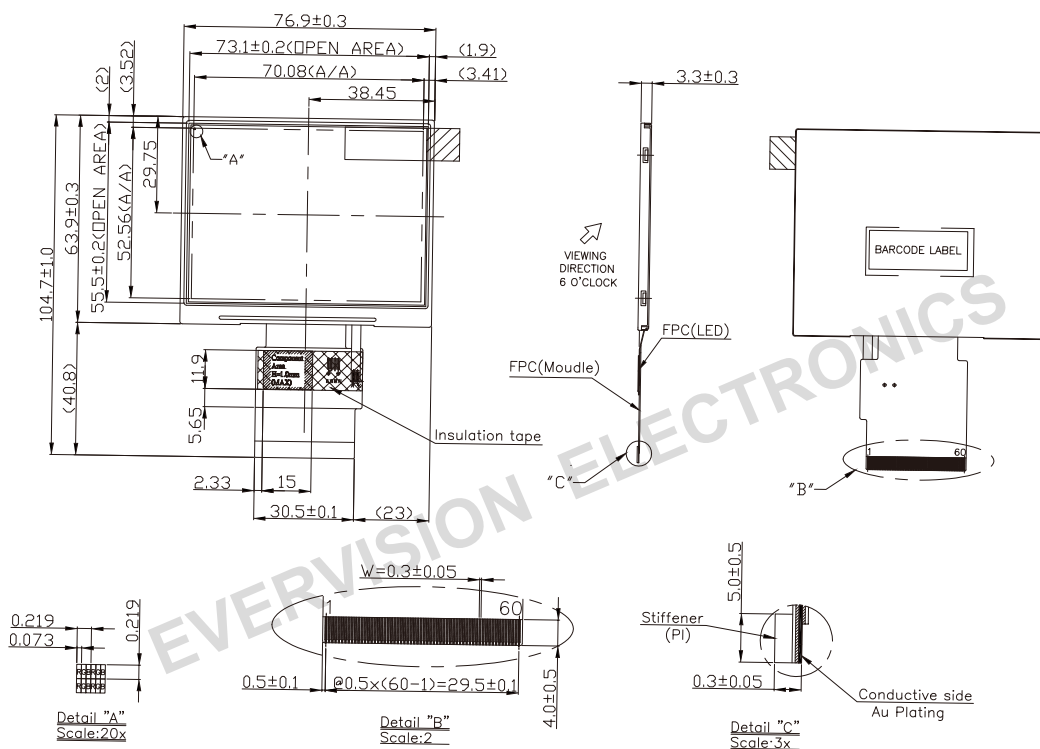

Feature

- 3.5 inches Color TFT
- View Direction : 6 o'clock
- Interface : TTL RGB
- Luminance : 800 (Typ.)
- Top -20~70°C ; Tst -30~80°C

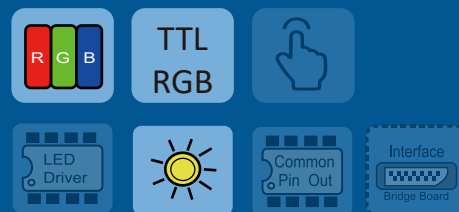

Mechanical Data

Item	Specifications	Unit
Outline Dimension	76.9 x 63.9 x 3.3	mm
Display Format	320RGB x 240	dot
Active Area	70.08 x 52.56	mm
Pixel Pitch	0.219 x 0.219	mm

Electrical Characteristics (Operating conditions)

Item	Symbol	Min	Typ	Max	Unit
Supply Voltage	VCC	2.5	3.3	3.6	V
Supply Current	ICC	-	15.6	22.0	mA

Electrical Characteristics (B/L driving conditions)

Item	Symbol	Min	Typ	Max	Unit
B/L Voltage	VB	-	(16.5)	-	V
B/L Current	IB	-	(40)	-	mA