


### Feature

1. 4.3 inches Color TFT
2. Micro Reflective Polarizer
3. View Direction : 6 o'clock
4. Interface : TTL RGB
5. Luminance : 630 nits (Typ.)
6. Touch Panel : Capacitive(I2C)
7. Top  $-20\sim 70^{\circ}\text{C}$  ; Tst  $-30\sim 80^{\circ}\text{C}$

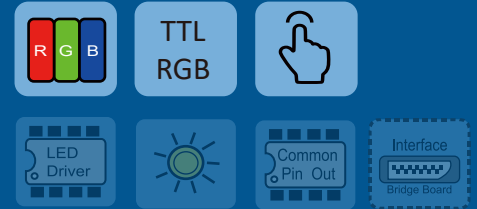

### Mechanical Data

Item	Specifications	Unit
Outline Dimension	105.5 x 67.2 x 4.7	mm
Display Format	480RGB x 272	dot
Active Area	95.04 x 53.856	mm
Pixel Pitch	0.198 x 0.198	mm

### Electrical Characteristics (B/L driving conditions)

Item	Symbol	Min	Typ	Max	Unit
B/L Voltage	VB	-	(33)	-	V
B/L Current	IB	-	20	-	mA

### Electrical Characteristics (Operating conditions)

Item	Symbol	Min	Typ	Max	Unit
Supply Voltage	VCC	3.0	3.3	3.6	V
Supply Current	ICC	-	22.8	31.9	mA

### Electrical Characteristics (T/P driving conditions)

Item	Symbol	Min	Typ	Max	Unit
Supply Voltage	VDD	3.0	3.3	3.6	V
Supply Current	IDD	-	12.5	17.5	mA