


Pin No.	Symbol
1	VCC
2	VCC
3	VSS
4	VSS
5	RIN0-
6	RIN0+
7	VSS
8	RIN1-
9	RIN1+
10	VSS
11	RNI2-
12	RNI2+
13	VSS
14	RCLK-
15	RCLK+
16	VSS
17	NC
18	NC
19	REV
20	VSS

Feature

- 5.7 inches Color TFT
- View Direction : 6 o'clock
- Interface : LVDS
- Luminance : 700 nits (Typ.)
- Touch Panel : Resistive
- Top -20~70°C ; Tst -30~80°C

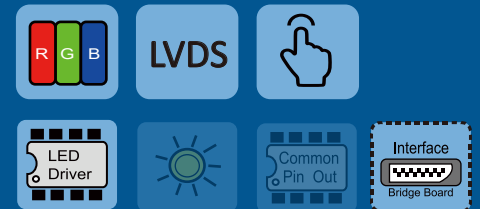

Mechanical Data

Item	Specifications	Unit
Outline Dimension	144.0 x 104.6 x 14.5	mm
Display Format	640RGB x 480	dot
Active Area	115.2 x 86.4	mm
Pixel Pitch	0.180 x 0.180	mm

Electrical Characteristics (Operating conditions)

Item	Symbol	Min	Typ	Max	Unit
Supply Voltage	VCC	3.0	3.3	3.6	V
Supply Current	ICC	-	225	315	mA

Electrical Characteristics (LED driving conditions)

Item	Symbol	Min	Typ	Max	Unit	Note
LED Driver Voltage	$V_{LED(DU)}$	11.2	12.0	12.6	V	-
LED Driver Current	$I_{LED(DU)}$	-	180	252	mA	B/L=200mA