
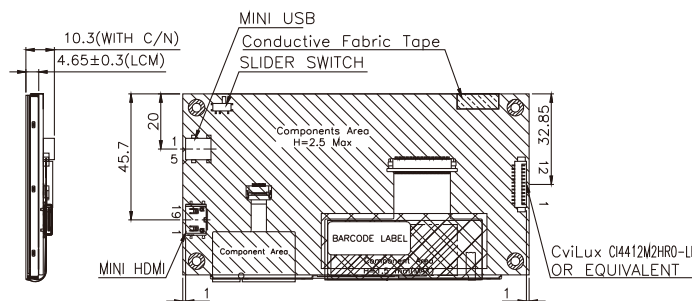
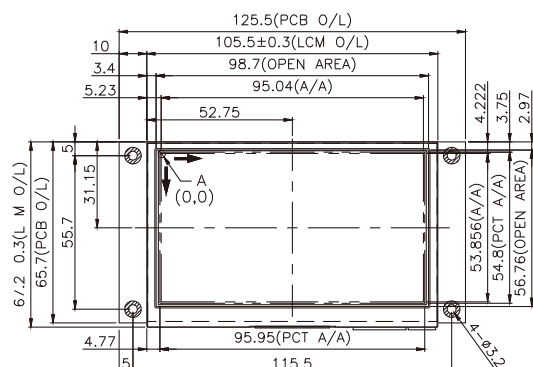


Detail "A"
Scale:30x

Pin No.	Symbol
1	TMDS Data2 Shield
2	TMDS Data2+
3	TMDS Data2-
4	TMDS Data1 Shield
5	TMDS Data1+
6	TMDS Data1-
7	TMDS Data0 Shield
8	TMDS Data0+
9	TMDS Data0-
10	TMDS Clock Shield
11	TMDS Clock+
12	TMDS Clock-
13	DDC Ground
14	N.C.
15	DDC_SCL
16	DDC_SDA
17	Reserved (N.C. on device)
18	+5V Power
19	HPD

Feature

1. 4.3 inches Color IPS TFT
2. Full view angle
3. Interface : HDMI*
4. Luminance : 715 nits (Typ.)
5. Touch Panel : Capacitive(USB)
6. Top -20~70°C ; Tst -30~80°C

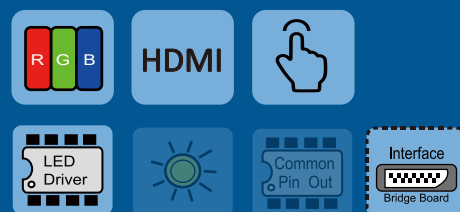

(*Support HDMI Interface, suit for your digital device.)

Mechanical Data

Item	Specifications	Unit
Outline Dimension	125.5 x 67.2 x 10.3	mm
Display Format	800RGB x 480	dot
Active Area	95.04 x 53.856	mm
Pixel Pitch	0.1188 x 0.1122	mm

Electrical Characteristics (Operating conditions)

Item	Symbol	Min	Typ	Max	Unit
Supply Voltage	VCC	4.5	5.0	5.5	V
Supply Current	ICC	-	550	770	mA

Item	Symbol	Min	Typ	Max	Unit
Supply Voltage	VCC	11.5	12.0	12.5	V
Supply Current	ICC	-	200	280	mA

Electrical Characteristics (T/P driving conditions)

Item	Symbol	Min	Typ	Max	Unit
T/P Voltage	VDD	4.8	5.0	5.2	V
T/P Current	IDD	-	30	42	mA