

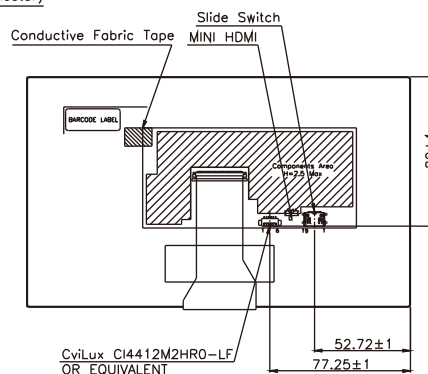




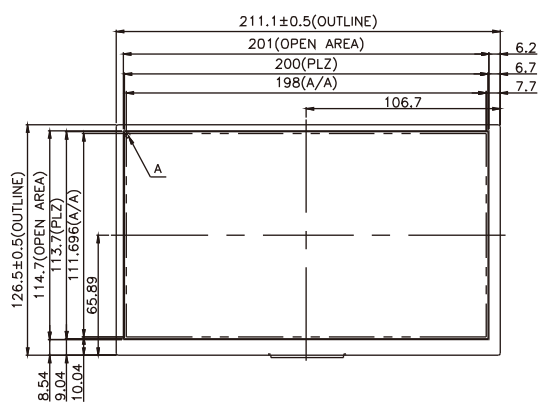

Pin No.	Symbol
1	TMDS Data2 Shield
2	TMDS Data2+
3	TMDS Data2-
4	TMDS Data1 Shield
5	TMDS Data1+
6	TMDS Data1-
7	TMDS Data0 Shield
8	TMDS Data0+
9	TMDS Data0-
10	TMDS Clock Shield
11	TMDS Clock+
12	TMDS Clock-
13	DDC Ground
14	N.C.
15	DDC_SCL
16	DDC_SDA
17	Reserved (N.C. on device)
18	+5V Power
19	HPD

Feature

1. 9.0 inches Color TFT
2. Viewing Direction : 6 O'clock
3. Interface : HDMI*
4. Luminance : 250 nits (Typ.)
5. Top -20~70°C ; Tst -30~80°C

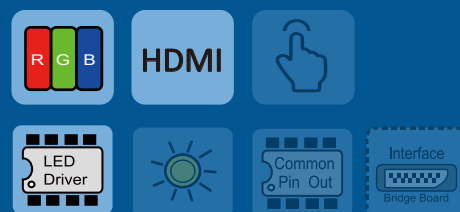

(*Support HDMI Interface, suit for your digital device.)

Mechanical Data

Item	Specifications	Unit
Outline Dimension	211.1 x 126.5 x 12.95	mm
Display Format	800RGB x 480	dot
Active Area	198.0 x 111.696	mm
Pixel Pitch	0.2475 x 0.2327	mm

Electrical Characteristics (Operating conditions)

Item	Symbol	Min	Typ	Max	Unit
Supply Voltage	VCC	4.5	5.0	5.5	V
Supply Current	ICC	-	680	952	mA

Item	Symbol	Min	Typ	Max	Unit
Supply Voltage	VCC	11.5	12.0	12.5	V
Supply Current	ICC	-	320	448	mA